NEW LEADER
PRECISION APPLICATION EQUIPMENT

DS35 G4 EDGE

Dry Nutrient Spinner Spreader

New Leader is the exclusive partner of John Deere® spinner spreaders.
The DS35 G4 Edge is factory installed on the 800R floater chassis.

PRECISION APPLICATION

- Boundary spreading capabilities
- Precise independent spinner control and monitoring
- Optional anti-slab kit

EASE OF USE

- Intuitive New Leader user interface
- System sensors to monitor spreader performance
- Feedgate optimizer to calculate height

EASE OF MAINTENANCE

- Centralized grease banks
- Automatic hydraulic chain tensioning system
- Automatic chain oiling routine and alarms
- 304 stainless steel cross tubes, mounts, and take-up brackets

OPTIONS

- The High Performance option offers Ag Lime compatibility at rates up to 6,600 lbs per acre
- Available in 304 stainless steel or 409 painted stainless steel

DS35 G4 Edge Specifications

SINGLE BIN

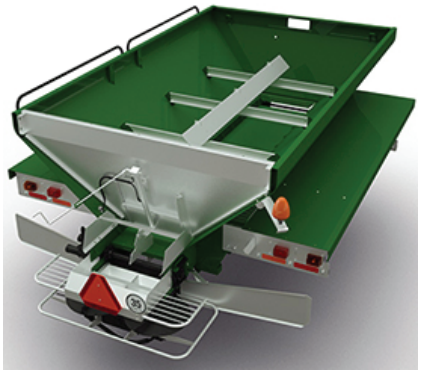

The single bin is available in 304 stainless steel or 409 painted stainless steel. A removable end gate, inverted V, and electric oiler are included. At 15 mph, the single bin can spread fertilizer at rates as high as 1,100 lbs per acre. Add the High Performance option and spread lime at rates as high as 2994 kg (6600 lb) per acre.

**The single bin does not come equipped with the Common Hydraulic Implement Pump on the 800R chassis. The secondary pump is required for the MultApplier, Multibin, and combo machine options.*

Unit Length	Estimated Weight	Struck Capacity
14 FT (4.27 M)	5,000 LBS (2,268 KG)	300 CU FT (8.50 CU M)

MULTAPPLIER™

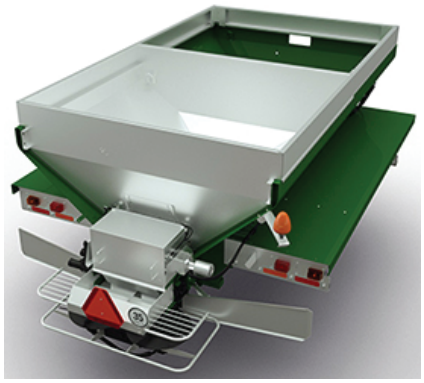

The MultApplier™ allows for two separate materials to be spread simultaneously and features a 24-inch wide #4 belt-over-chain conveyor. The direct-driven conveyor is also controlled independently enabling the delivery of material at variable rates through the adjustable gate at the rear of the hopper body. The hillside divider improves material placement on the spinner for a more effective spread pattern.

Struck Capacity

Bin 1	MultApplier Bin	Total
195 CU FT (5.52 CU M)	161 CU FT (4.60 CU M)	356 CU FT (10.12 CU M)

MULTIBIN™

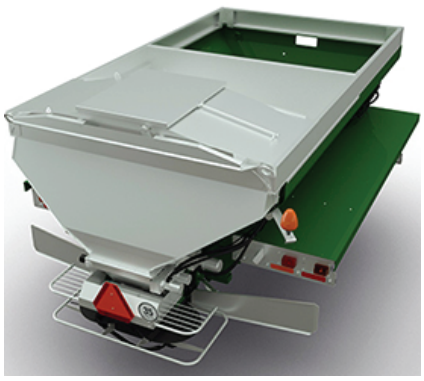

Inserting the MultiBin will convert the spreader to 2, 3 or 4 bins, which can be used independently or together for straight and variable rate applications. Sensors are located in all bins to warn when materials are low. The MultiBin also comes equipped with an upper and lower material divider which improves material placement on the spinner for a more effective spread pattern.

Struck Capacity

Bin 1	Bin 2	MicroBin 3	MicroBin 4	Total
195 CU FT (5.52 CU M)	139 CU FT (3.94 CU M)	23 CU FT (0.65 CU M)	21 CU FT (0.59 CU M)	378 CU FT (10.70 CU M)

Products and specifications subject to change without notice.
Photos and illustrations may or may not include optional equipment.
John Deere and the John Deere green and yellow trade dress are the trademarks of Deere & Company.

New Leader® is a registered trademark of New Leader Manufacturing.
© 2023 New Leader Manufacturing.
JD-DS35G4-2023-03