



DS35 G5

Dry Nutrient Spinner Spreader

New Leader is the exclusive partner of John Deere® spinner spreaders. The DS35 G5 is factory installed on the 800R floater chassis.

PRECISION APPLICATION

- 16-section swath width control
- 1/2 width spreading
- Last pass control
- Boundary spreading
- Independent spinner control and monitoring
- Automatic feedgate and spinner frame control


EASE OF USE

- Intuitive New Leader user interface with up to 25 stored product profiles
- System sensors to monitor spreader performance
- Feedgate optimizer with automatic adjustment

EASE OF MAINTENANCE

- Centralized grease banks
- Automatic hydraulic chain tensioning system
- Automatic chain oiling routine and alarms
- 304 stainless steel cross tubes, mounts, and take-up brackets
- Diagnostic feedback


SWATH WIDTH CONTROL

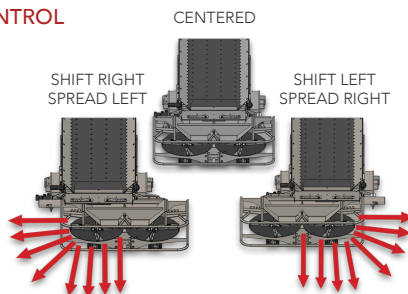



DS35 G5 Specifications


SINGLE BIN

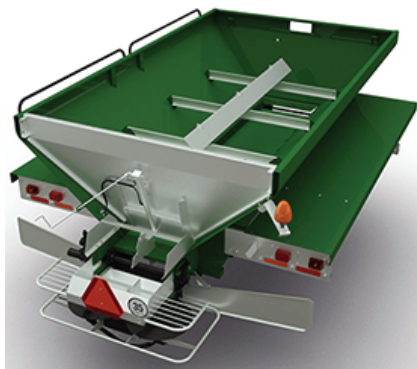

The single bin is available in 304 stainless steel or 409 painted stainless steel. A removable end gate, inverted V, and electric oiler are included.

Unit Length	Estimated Weight	Struck Capacity
14 FT (4.27 M)	1,400 LBS (635 KG)	300 CU FT (8.50 CU M)

MULTAPPLIER™

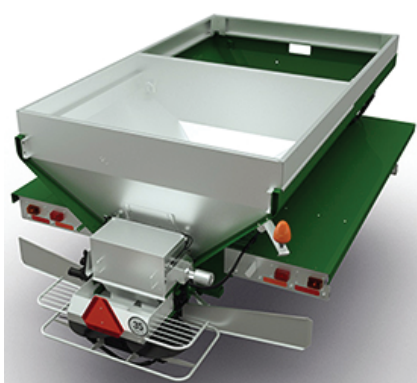


The Multiplier™ allows for two separate materials to be spread simultaneously and features a 24-inch wide #4 belt-over-chain conveyor. The direct-driven conveyor is also controlled independently enabling the delivery of material at variable rates through the adjustable gate at the rear of the hopper body. The hillside divider improves material placement on the spinner for a more effective spread pattern.

Struck Capacity

Bin 1	Multiplier Bin	Total
195 CU FT (5.52 CU M)	161 CU FT (4.60 CU M)	356 CU FT (10.12 CU M)

MULTIBIN™

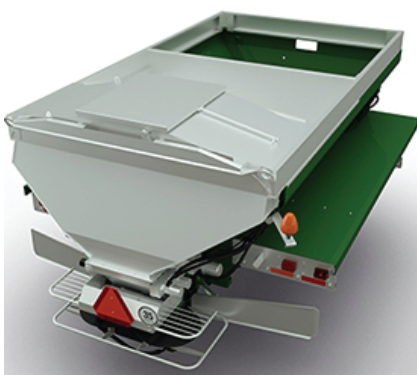

Inserting the MultiBin will convert the spreader to 2, 3 or 4 bins, which can be used independently or together for straight and variable rate applications. Sensors are located in all bins to warn when materials are low. The MultiBin also comes equipped with an upper and lower material divider which improves material placement on the spinner for a more effective spread pattern.

Struck Capacity

Bin 1	Bin 2	MicroBin 3	MicroBin 4	Total
195 CU FT (5.52 CU M)	139 CU FT (3.94 CU M)	23 CU FT (0.65 CU M)	21 CU FT (0.59 CU M)	378 CU FT (10.70 CU M)

Products and specifications subject to change without notice.
Photos and illustrations may or may not include optional equipment.
John Deere and the John Deere green and yellow trade dress are the trademarks of Deere & Company.