



NL5060

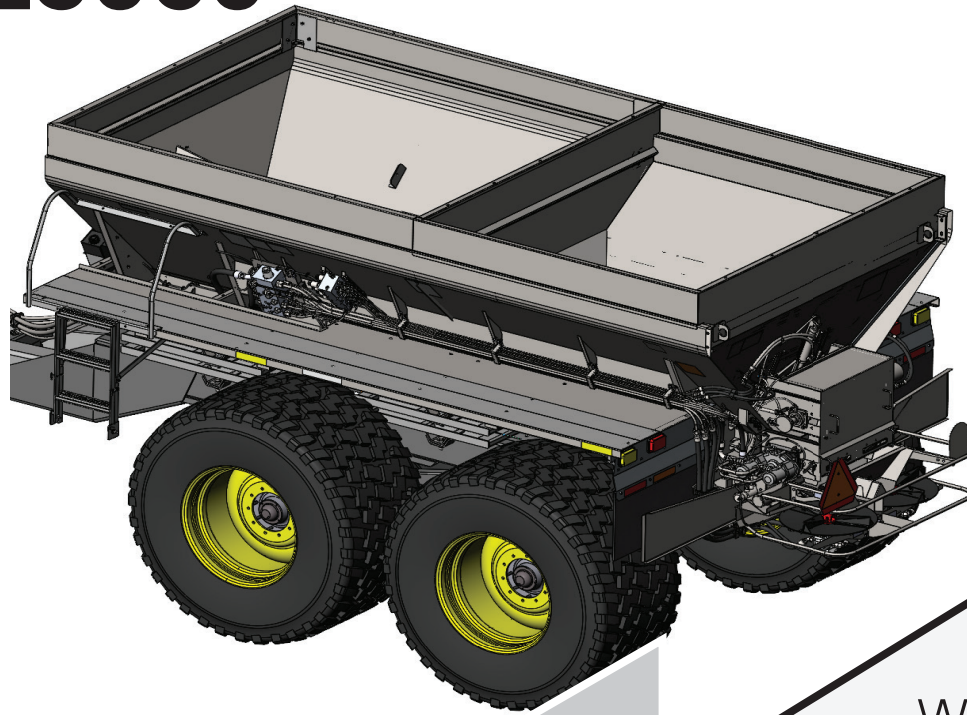

 1330 76th Ave SW
Cedar Rapids, Iowa

 319.363.8281

 NewLeader.com

NL5060 G5

The NL5060 G5 sets itself apart by allowing operators to apply fertilizer with pinpoint accuracy.

By using the G5 spinner technology and leveraging the conveyor speed adjustments, operators can reduce overlap, decrease nutrient waste, and ensure nutrients are placed only where they need them, not where they don't.

WHAT IT DOES

Precision Application

- 16-section swath width control
- ½ width spreading
- Last Pass Control
- Boundary spreading
- Precise independent spinner control and monitoring
- Automatic feedgate and fan frame control
- Scales for static and infield calibration
- Optional MultiApplier: spread up to two products.

Ease of Use

- Intuitive New Leader user interface
- System sensors to monitor spreader performance
- Feedgate optimizer with automatic adjustment

Ease of Maintenance

- Centralized grease banks
- Automatic chain tensioner
- Automatic chain oiling routine and alarms
- 304 stainless steel cross tubes, mounts, and take-up brackets
- Diagnostic feedback

Trailer Features

- Heavy-duty trailer main frame with receiver hitch
- Optional 4-wheel hydraulic braking system
- Walking suspension with 15" of travel
- High flotation tires for light footprint

TECHNICAL DATA SHEET



NL5060 G5	
Length	In (Cm)
16' (4.88m)	192 (741)
Struck Capacity	Cu Ft (Cu M)
16' (4.88m)	606 (17.2)
Est. Weight	Lbs (Kg)
16' (4.88m)	18,300 (8,300)

7 FT MULTAPPLIER	
Est. Ship Weight	Lbs (Kg)
16' (4.88m)	1,303 (590)
Insert Capacity	Cu Ft (Cu M)
16' (4.88m)	161 (4.56)
Bin 1	253 (7.16)
Bin 1 Total Struck Capacity	414 (11.72)

