



Super P Medium-Duty Spreader

Municipalities, contractors and lawn/landscape professionals make the Super P medium-duty spreader their first choice for maximum maneuverability plus workhorse capacity. And when capacity takes priority, take it up a notch with the Super P High Capacity. Advanced features like an inverted V that mounts in fixed position take both to the next level (optional on 8 ft. units).

PRODUCTIVITY FEATURES

- Heavy-duty hopper with 12-gauge sides and ends
- 10-gauge conveyor bottom and sills
- Conveyor system with heat-treated, self-cleaning pintle conveyor chain with 3/8" x 3/4" (.95cm x 1.9cm) chain bars positioned on approximately 5" (12.7cm) centers
- Heavy-duty spinner assembly with six material baffles provides control of the direction and width of spread patterns
- On Super P: 10.5 HP (standard capacity Super P) or 11.0 HP (high capacity Super P) engine with the following in-cab controls: electric engine throttle for in-cab control of engine speed and spread width; electric clutch for stopping and starting conveyor and spinner regardless of engine speed; starter/alternator for in-cab startup of engine and continued recharging of battery while in operation

- Hanging inverted "V" minimizes bridging and reduces pressure on the conveyor (not standard on 8' units)


OPTIONAL FEATURES

- Unpainted 304 stainless steel construction
- 11.0 HP Honda engine drive with in-cab controls or dual hydraulic drive
- Heavy-Duty single piece screen or two-piece flip-up screens are available
- Dual Hydraulic Drive ILO Gas Engine Drive
- Belt-over-chain option is available and intended for use when low application of granular material is needed

HI-WAY Super P

Super P						
Length (ft)	Length (m)	Width	Overall Length	Height	Struck Capacity	Approx. Body Weight
8'	2.44	59.5"	115.6"	39"	2.7 yds3	895 lbs. (406 kg)
9'	2.74	59.5"	128.0"	39"	3.0 yds3	995 lbs. (451 kg)
9' LP*	2.74	59.5"	128.0"	32"	1.9 yds3	900 lbs. (408 kg)
9' HC	2.74	80.0"	128.0"	43"	4.03 yds3	1105 lbs (501 kg)
10'	3.05	59.5"	139.6"	39"	3.4 yds3	1095 lbs. (497 kg)
10' HC	3.05	80.0"	139.6"	43"	4.4 yds3	1205 lbs. (547 kg)
11'	3.35	59.5"	151.6"	39"	3.6 yds3	1195 lbs. (542 kg)
11' LP*	3.35	59.5"	151.6"	32"	2.4 yds3	1100 lbs. (499 kg)
12'	3.66	59.5"	163.6"	39"	3.9 yds3	1295 lbs. (587 kg)

Note: Super P High Capacity requires a minimum GVWR of 20,000 lbs.
 * LP = Low Profile

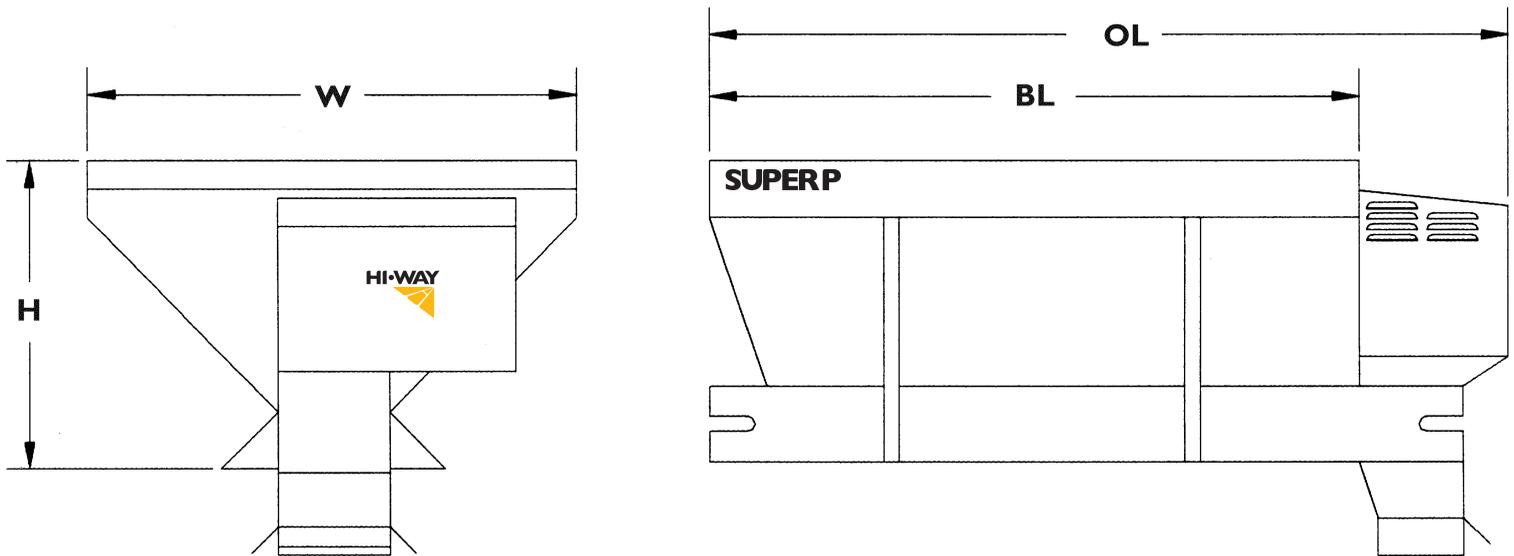

Products and specifications subject to change without notice.
 Photos and illustrations may or may not include optional equipment.
 Hi-Way® is a registered trademark of Highway Equipment Company, Inc., d/b/a New Leader Manufacturing.
 © 2023 Highway Equipment Company, Inc., d/b/a New Leader Manufacturing.
 SUPERP_F&B