



# DS35 G4 EDGE

## Dry Nutrient Spinner Spreader

New Leader is the exclusive partner of John Deere® spinner spreaders.  
The DS35 G4 Edge is compatible on the 800R floater chassis.

### PRECISION APPLICATION

- Boundary spreading capabilities
- Precise independent spinner control and monitoring
- Automatic feed gate and spinner frame control
- Optional anti-slab kit

### EASE OF MAINTENANCE

- Centralized grease banks
- Automatic hydraulic chain tensioning system
- Automatic chain oiling routine and alarms
- 304 stainless steel cross tubes, mounts, and take-up brackets

### EASE OF USE


- Intuitive New Leader user interface with up to 25 stored product profiles
- System sensors to monitor spreader performance
- Feedgate optimizer with automatic adjustments
- Standard High Output Kit for high-rate fertilizer applications (remove for lime)

### OPTIONS

- The High Performance option offers Ag Lime compatibility at rates up to 6,600 lbs per acre
- Available in 304 stainless steel or 409 painted stainless steel

# DS35 G4 Edge Specifications

## SINGLE BIN

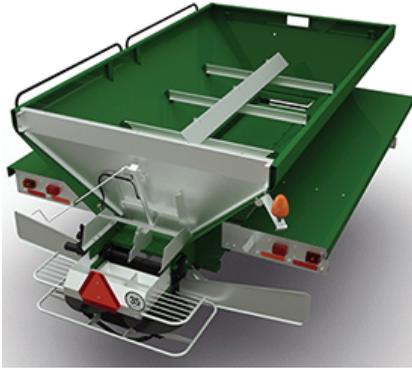

The single bin is available in 304 stainless steel or 409 painted stainless steel. A removable end gate, inverted V, and electric oiler are included. At 15 mph, the single bin can spread fertilizer at rates as high as 1,100 lbs per acre. Add the High Performance option and spread lime at rates as high as 2994 kg (6600 lb) per acre.

Unit Length	Estimated Weight	Struck Capacity
14 FT (4.27 M)	1,400 LBS (635 KG)	300 CU FT (8.50 CU M)

## MULTAPPLIER™



The Multiplier™ allows for two separate materials to be spread simultaneously and features a 24-inch wide #4 belt-over-chain conveyor. The direct-driven conveyor is also controlled independently enabling the delivery of material at variable rates through the adjustable gate at the rear of the hopper body. The hillside divider improves material placement on the spinner for a more effective spread pattern.

Struck Capacity		
Bin 1	Multiplier Bin	Total
195 CU FT (5.52 CU M)	161 CU FT (4.60 CU M)	356 CU FT (10.12 CU M)

## MULTIBIN™



Inserting the MultiBin will convert the spreader to a 3 or 4 bins, which can be used independently or together for straight and variable rate applications. Sensors are located in all bins to warn when materials are low. The MultiBin also comes equipped with an upper and lower material divider which improves material placement on the spinner for a more effective spread pattern.

Struck Capacity				
Bin 1	Bin 2	MicroBin 3	MicroBin 4	Total
195 CU FT (5.52 CU M)	143 CU FT (4.05 CU M)	23 CU FT (0.65 CU M)	21 CU FT (0.59 CU M)	382 CU FT (10.81 CU M)

Products and specifications subject to change without notice.  
Photos and illustrations may or may not include optional equipment.  
John Deere and the John Deere green and yellow trade dress are the trademarks of Deere & Company.