

DS35 G4 Edge



1330 76th Ave SW
Cedar Rapids, Iowa

319.363.8281

NewLeader.com

DS35 G4 Edge

The DS35 is a spinner spreader designed for installation on a 800R chassis. The G4 Edge variable rate dry nutrient applicator utilizes patented G4 spinner technology, proven to spread materials faster, wider and more consistently.

The advanced Edge features include precise boundary spreading, automatic chain tensioning, New Leader user interface and much more.

WHAT IT DOES

Precision Application

- Boundary spreading
- Precise independent spinner control and monitoring
- Optional anti-slab kit

Ease of Use

- Intuitive New Leader user interface
- System sensors to monitor spreader performance
- Feedgate optimizer
- Standard High Output Kit for high-rate fertilizer applications (lime excluded)

Ease of Maintenance

- Centralized grease banks
- Automatic hydraulic chain tensioning system
- Automatic chain oiling routine and alarms
- 304 stainless steel cross tubes, mounts and take-up brackets
- Diagnostic feedback

Options

- The high performance option offers Ag Lime compatibility at rates up to 6,600 lbs per acre
- Available in 304 stainless steel or 409 painted stainless steel


TECHNICAL DATA SHEET

The single bin is available in 304 stainless steel or 409 painted stainless steel. A removable end gate, inverted V and electric oiler are included.



Unit Length	Estimated Weight	Struck Capacity
14 Ft (4.27 m)	5,500 lbs (2,494 kg)	300 Cu Ft (8.50 Cu M)

The MultiApplier allows for two separate materials to be spread simultaneously and features a 24-inch wide #4 belt-over-chain conveyor. The direct-driven conveyor is controlled independently enabling the delivery of material at variable rates through the adjustable gate at the rear of the hopper body. The hillside divider improves material placement on the spinner for a more effective spread pattern.

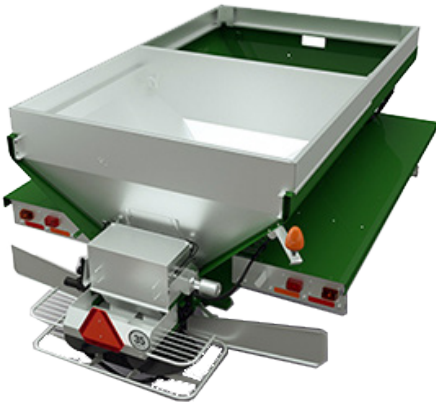

Bin 1	MultiApplier Bin	Total
195 Cu Ft (5.52 Cu M)	161 Cu Ft (4.60 Cu M)	356 Cu Ft (10.12 Cu M)

Inserting the MultiBin will convert the spreader to 2, 3, or 4 bins, which can be used independently or together for straight and variable rate applications. Sensors are located in all bins to warn when materials are low. The MultiBin comes equipped with an upper and lower material divider which improves material placement on the spinner for a more effective spread pattern.



Bin 1	Bin 2	MicroBin 3	MicroBin 4	Total
195 Cu Ft (5.52 Cu M)	143 Cu Ft (4.04 Cu M)	23 Cu Ft (.65 Cu M)	21 Cu Ft (.59Cu M)	378 Cu Ft (10.70 Cu M)