


L4000



 1330 76th Ave SW
Cedar Rapids, Iowa

 319.363.8281

 NewLeader.com

L4000 G4

The spinner assembly that started it all. As the first broadcast spinner to allow operators the ability to spread material up to 90 feet in up to 25 MPH winds, all while maintaining a consistent and accurate spread pattern, the L4000G4 revolutionized the broadcast spinner spreader industry.

WHAT IT DOES

Precision Application

- Consistent and accurate spread patterns up to 90 feet
- Variable rate capabilities

Ease of Use

- Bolted-in rear endgate for better structural integrity and multi-product capabilities
- #4 belt over chain conveyor system with electric oiler
- Adjustable inverted V
- Hill side divider




Ease of Maintenance

- Spinner motor with stainless steel shaft sleeve

Multi-Product Capabilities

- MultiApplier: Two product variable rate spreading
- MultiBin: Four product variable rate spreading

TECHNICAL DATA SHEET

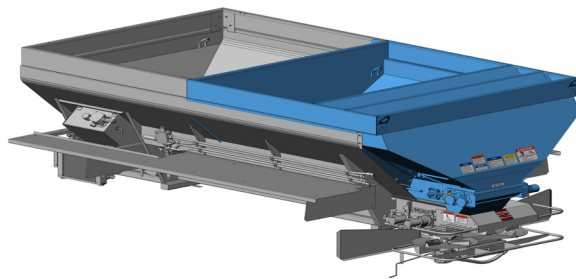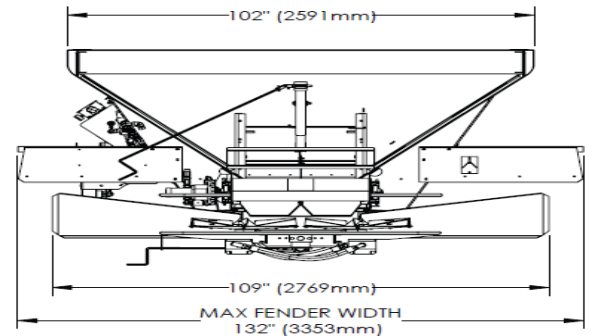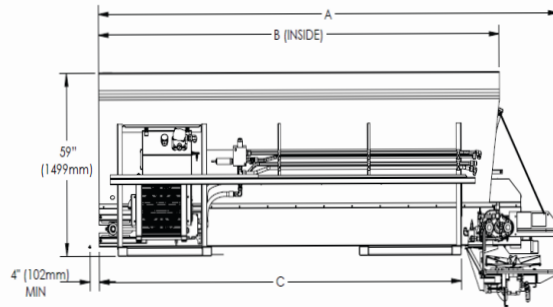

Est. Insert Ship Weight	5ft MultApplier	7ft MultApplier
Est. Ship weight	1,000 lbs (455kg)	1,200 lbs (546kg)
	Capacities with 5ft MultApplier Cu Ft (Cu M)	Capacities with 7ft MultApplier Cu Ft (Cu M)
13' Bin 1 Struck Capacity	226 (6.40)	168 (4.76)
13' Bin 2 Struck Capacity	115 (3.25)	161 (4.56)
13' Total Struck Capacity	341 (9.65)	329 (9.32)
14' Bin 1 Struck Capacity	255 (7.22)	197 (5.58)
14' Bin 2 Struck Capacity	115 (3.25)	161 (4.56)
14' Total Struck Capacity	370 (10.47)	358 (10.14)

L4000	
Length (m)	In (cm)
13' (3.96)	184 (467.4)
14' (4.27)	196 (497.8)
Struck Capacity	Cu Ft (Cu M)
13' (3.96)	278 (7.87)
14' (4.27)	300 (8.50)
Est. Weight	Lbs (kg)
13' (3.96)	3,700 (1,682)
14' (4.27)	4,000 (1,819)

MultiBin - Side board included	
Struck Capacity	Cu Ft (Cu M)
Body - Bin 1	197 (5.38)
MultiBin - Bin 2	139 (3.94)
MultiBin - Bin 3	23 (.65)
MultiBin - Bin 4	21 (.59)
14' Total Capacity	380 (10.76)