NL4560



1330 76th Ave SW Cedar Rapids, Iowa

319.363.8281

NewLeader.com

NL4560 <mark>G4 Edge</mark>

The G4 Edge variable rate dry nutrient applicator utilizes patented G4 spinner technology, proven to spread materials faster, wider, and more consistently.

The advanced Edge features precise boundary spreading, automatic chain tensioning and New Leader user interface, among other new features.



WHAT IT DOES

Precision Application

Boundary spreading

EWLEADER

- Precise independent spinner control and monitoring
- Automatic feedgate and fan frame control
- Scales for static and infield calibration
- Optional MultApplier: spread up to four products

Ease of Use

- Intuitive New Leader user interface
- System sensors to monitor spreader performance
- Feedgate optimizer to calculate height

Ease of Maintenance

- Centralized grease banks
- Automatic hydraulic chain tensioning system
- Automatic chain oiling routine and alarms
- 304 stainless steel feedgate, spinner jacks and handles


Trailer Features

- Heavy-duty trailer main frame with universal hitch
- 4-wheel hydraulic braking system
- Walking suspension with 12" of travel
- High flotation tires for light footprint

TECHNICAL DATA SHEET

NL4560G4 EDGE		
Struck Capacity	Cubic Meters	Cubic Feet
W/ 24" side boards	17.22	608
Estimated Weight	Lbs	Kg
Spreader	5,002	2,269
Trailer	15,356	6,961
Side boards	422	192



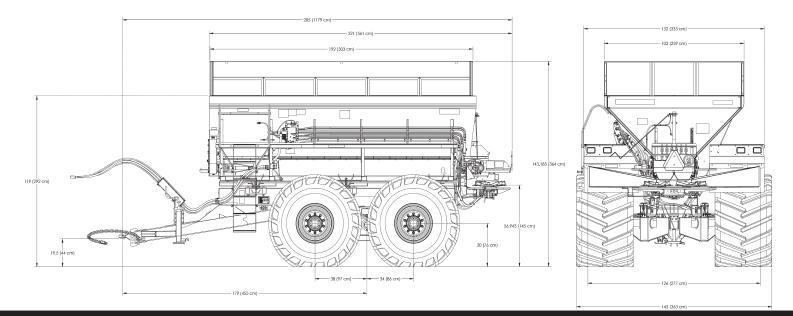



New Leader Manufacturing Equipmentsales@newleader.com 800-363-8281