



XT3 Series

XT3 Bodies

Multi-Purpose Dump Bodies

Built for unmatched versatility, the XT3 is engineered to haul, spread, and dump with ease—all in one high-performance machine. Featuring industry-leading capacity and a lower center of gravity than comparable-radius bodies, the XT3 hauls more and spreads farther, boosting overall truck productivity.

XT3 Type I



XT3 Type I

- Up to 15.6 cubic yard struck capacity
- Front and/or rear discharge is available
- Front discharge conveyor is capable of right or left discharge

XT3 Type II

- Up to 15.9 cubic yard struck capacity
- Front discharge with asphalt-style tailgate allows for use with paving equipment
- Front discharge conveyor is capable of right or left discharge

XT3 Type III

- Up to 17.1 cubic yard struck capacity
- Rear discharge with access panel for ease in maintenance of rear drive assembly
- Multiple configurations available for increased liquid capacity



XT3 Type II

XT3 A2

For maximum productivity and minimum maintenance, choose the XT3 A2 multi-purpose dump body with dual augers. It has the largest capacity & lowest center of gravity of any radius style body produced—giving you the productivity and ROI you need.

- Up to 16.0 cubic yard struck capacity
- Dual auger conveyor system eliminates carry-back of material
- Auger flighting constructed from AR400 steel for long life and reduced maintenance
- Dome screens, conveyor cover, and centralized grease bank are standard

XT3 Options

- High Volume Liquid storage for pre-wet or anti-icing
- Pre-wet and anti-icing systems
- Toolbox, underbody pans, screens, ladder, conveyor cover, cab shield, oiler, lights, sideboards
- 304 stainless steel construction



XT3 A2

Features & Benefits of XT3 A2 Prewet

- $\frac{3}{4}$ " stainless pipe introduces liquid over flighting. Liquid is blended into material prior to discharge onto the spinner through auger rotation.
- Liquid pipe can be easily removed (one bolt) for service and/or calibration of liquid application.

Options

- Tool box
- High volume liquid storage for pre-wet or anti-icing
- Ladder
- Cab shield
- Lights



XT3 Type III

XT3 Bodies

Options & Specifications

Discover the versatile features and customizable options of Hi-Way's XT3 Multi-Purpose Dump Bodies. With a wide range of options and specifications, the XT3 delivers unmatched durability, efficiency, and control for year-round performance.

XT3 TYPE I




Spinner/Conveyor

The rear spinner assembly adjusts up/down, side to side, and fore/aft for precise spread pattern control.



Body

95.5" (243cm) wide body provides maximum capacity. Body side sheet and floor feature one-piece construction.

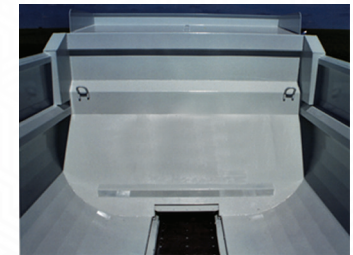

Hoist

Front telescopic hoist provides lower center of gravity when dumping. Cylinder includes 2-year warranty.

Length (ft)	Length (m)	Width	CA/CT*	Struck Capacity	Struck Capacity w/ Sideboards	Approx. Body Weight
9'/10'	2.74/3.05	95.5"	84"	6.4 yds3	9.7 yds3	4025 lbs. (1826 kg)
10'/11'	3.05/3.35	95.5"	96"	7.2 yds3	10.8 yds3	4215 lbs. (1912 kg)
11'/12'	3.5/3.66	95.5"	108"	8.0 yds3	12.0 yds3	4405 lbs. (1998 kg)
12'/13'	3.66/3.96	95.5"	108"	8.8 yds3	13.2 yds3	4595 lbs. (2084 kg)
13'/14'	3.96/4.27	95.5"	120"	9.7 yds3	14.5 yds3	4785 lbs. (2170 kg)
14'/15'	4.27/4.57	95.5"	132"	10.5 yds3	15.6 yds3	4975 lbs. (2257 kg)

XT3 TYPE II



Spinner/Conveyor

The rear spinner assembly adjusts up/down, side to side, and fore/aft for precise spread pattern control.



Body

95.5" (243cm) wide body provides maximum capacity. Body side sheet and floor feature one-piece construction.



Hoist

Front telescopic hoist provides lower center of gravity when dumping. Cylinder includes 2-year warranty.

Length (ft)	Length (m)	Width	CA/CT*	Struck Capacity	Struck Capacity w/ Sideboards	Approx. Body Weight
9'/10'	2.74/3.05	95.5"	84"	6.7 yds3	10.0 yds3	3998 lbs. (1813 kg)
10'/11'	3.05/3.35	95.5"	96"	7.5 yds3	11.1 yds3	4188 lbs. (1900 kg)
11'/12'	3.5/3.66	95.5"	108"	8.4 yds3	12.4 yds3	4378 lbs. (1986 kg)
12'/13'	3.66/3.96	95.5"	108"	9.2 yds3	13.6 yds3	4568 lbs. (2072 kg)
13'/14'	3.96/4.27	95.5"	120"	10.0 yds3	14.8 yds3	4758 lbs. (2158 kg)
14'/15'	4.27/4.57	95.5"	132"	10.8 yds3	15.9 yds3	4948 lbs. (2244 kg)

XT3 TYPE III



Pre-Wet System

Liquid is blended into material prior to discharge onto the spinner through chain conveyor system



Spinner

The rear spinner assembly adjusts up/down, side-to-side, and fore/aft for precise spread pattern control



Hoist

Front telescopic hoist provides lower center of gravity when dumping. Cylinder includes 2-year warranty.

Length (ft)	Length (m)	Width	CA/CT*	Struck Capacity	Struck Capacity w/ Sideboards	Approx. Body Weight
10'	3.05	95.5"	84"	7.6 yds3	11.2 yds3	4323 lbs. (1961 kg)
11'	3.35	95.5"	96"	8.4 yds3	12.4 yds3	4513 lbs. (2047 kg)
12'	3.66	95.5"	108"	9.2 yds3	13.6 yds3	4703 lbs. (2133 kg)
13'	3.96	95.5"	108"	10.0 yds3	14.7 yds3	4893 lbs. (2219 kg)
14'	4.27	95.5"	120"	10.9 yds3	16.0 yds3	5083 lbs. (2306 kg)
15'	4.57	95.5"	132"	11.7 yds3	17.1 yds3	5273 lbs. (2392 kg)

**The Cab to Axle/Tandem dimensions are only guidelines. Consult federal, state and local weight laws and chassis manufacturer's ratings to ensure neither government weight restrictions, nor GVWR and GAWRs are exceeded.*

XT3 A2



Pre-wet System

Liquid is blended into material prior to discharge onto the spinner through chain conveyor system.



Dual Auger

Precision delivery of material to spinner.
No carryback of material.



Body

95.5" (243cm) wide body provides maximum capacity. Body side sheets and floor feature one-piece construction.

Length (ft)	Length (m)	Width	CA/CT*	Struck Capacity	Struck Capacity w/ Sideboards	Approx. Body Weight
10'	3.05	95.5"	84"	7.6 yds3	11.2 yds3	4323 lbs. (1961 kg)
12'	3.66	95.5"	108"	9.2 yds3	13.6 yds3	4703 lbs. (2133 kg)
13'	3.96	95.5"	108"	10.0 yds3	14.7 yds3	4893 lbs. (2219 kg)
14'	4.27	95.5"	120"	10.9 yds3	16.0 yds3	5083 lbs. (2306 kg)



HI-WAY

ROAD MAINTENANCE EQUIPMENT

Manufactured by

NEW LEADER MANUFACTURING

1330 76th Avenue SW | Cedar Rapids, Iowa 52404

information@newleader.com

www.newleader.com

Ph. 800.363.8281

Building the Best Since 1939