



1330 76th Ave SW
Cedar Rapids, Iowa



319.363.8281



NewLeader.com

**NL7**

WHAT **IT** DOES

Productivity

- Up to 120' spread pattern
- 33% more efficient high output design
- Uniformity of spread pattern
- 16-section swath width
- Boundary and half-width spreading

Ease of Use

- Built-in spread pattern wizard
- Ability to pattern test and set the machine, using only 3 pans
- New NLM control system with intuitive user interface with minimal button presses for field operation
- Conveyor calibration is not required

Versatility

- Low sensitivity to driving centers
- Variable rate width spreading from 120', 90', 80' and 70'
- Automated in field pattern control as width or product volume change

Ease of Maintenance

- Zero grease points
- New positive drive straight belt requiring minimal maintenance
- Tool-free components
- Easy to replace fin overlays





NL7 SERIES

With dual bins and stacked conveyors, the NL7 spreader represents a shift in the agriculture industry.



Combining unprecedented design with ease-of-use, the NL7 can help you achieve unrivaled productivity. Crop damage, unnecessary passes, overlap, and soil compaction will become a thing of the past for you and your business.

TECHNICAL DATA SHEET

12' Unit

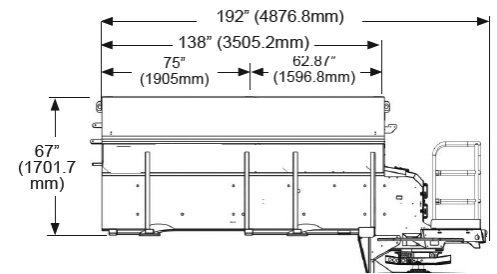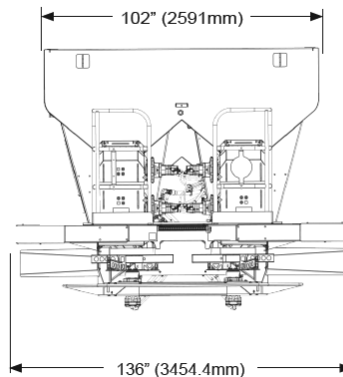

14' Unit

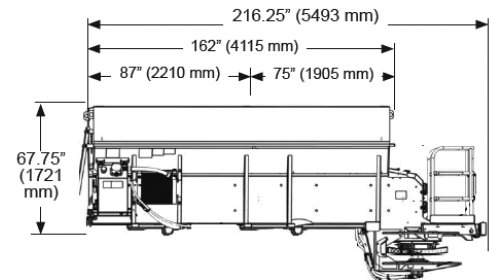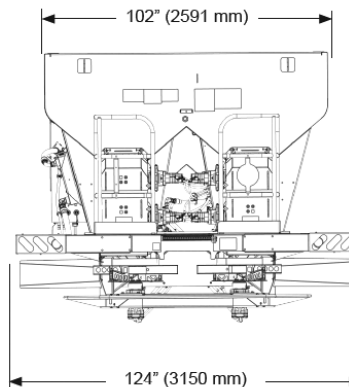

NL720 Dual Bin	
Dual-Bin Capacity	Cu Ft (Cu M)
12' (3.66m) - Bin 1	183 (5.2)
12' (3.66m) - Bin 2	120 (3.4)
12' (3.66m) - Total	303 (8.6)
14' (4.26m) - Bin 1	218 (6.2)
14' (4.26m) - Bin 2	145 (4.1)
14' (4.26m) - Total	363 (10.3)
Est. Weight	Lbs (kg)
12' (3.66m)	6,200 (2,812)
14' (3.66m)	6,800 (3,084)