

# SUPER P

# SUPER P

## MEDIUM-DUTY SPREADER



Municipalities, contractors and lawn/landscape professionals make the Super P medium-duty spreader their first choice for maximum maneuverability plus workhorse capacity. And when capacity takes priority, take it up a notch with the Super P High Capacity. Advanced features like an inverted V that mounts in fixed position take both to the next level (optional on 8 ft. units).

### PRODUCTIVITY FEATURES



- 304 Stainless Steel Heavy-duty hopper with 12-gauge sides and ends
  - 10-gauge conveyor bottom and sills
  - Conveyor system with heat-treated, self-cleaning pintle conveyor chain with 3/8" x 3/4" (.95cm x 1.9cm) chain bars positioned on approximately 5" (12.7cm) centers
  - Heavy-duty spinner assembly with six material baffles provides control of the direction and width of spread patterns
- Honda 11.0 HP engine with the following in-cab controls: electric engine throttle for in-cab control of engine speed and spread width; electric clutch for stopping and starting conveyor and spinner regardless of engine speed; starter/alternator for in-cab startup of engine and continued recharging of battery while in operation
- Hanging inverted "V" minimizes bridging and reduces pressure on the conveyor (not standard on 8' units)

### OPTIONAL FEATURES

- Heavy-duty single piece screen or two-piece flip-up screens are available
- Belt-over-chain option is available and intended for use when low application of granular material is needed
- Extended Spinner option ILO 26" Spinner (*extended spinner length is approximately 38" below the sills of the spreader*)
- Dual Hydraulic Drive ILO Gas Engine Drive
- Hydraulic Reservoir and filter
- Dual Flow Control Valve
- Hose and fitting kit for dual hydraulic drive

# SUPER P

| Length (ft) | Length (m) | Width          | Overall Length  | Height       | Struck Capacity    | Approx. Body Weight |
|-------------|------------|----------------|-----------------|--------------|--------------------|---------------------|
| 8'          | 2.44       | 59.5" (151 cm) | 115.6 (294 cm)  | 39" (99 cm)  | 2.7 yds3 (2.1 m3)  | 895 lbs. (406. kg)  |
| 9'          | 2.74       | 59.5" (151 cm) | 128.0 (325 cm)  | 39" (99 cm)  | 3.0 yds3 (2.3 m3)  | 995 lbs. (451 kg)   |
| 9' LP*      | 2.74       | 59.5 (151 cm)  | 128.0 (325 cm)  | 32" (81 cm)  | 1.9 yds3 (1.5 m3)  | 900 lbs. (408 kg)   |
| 9' HC       | 2.74       | 80.0" (230 cm) | 128.0" (325 cm) | 43" (109 cm) | 4.03 yds3 (3.1 m3) | 1105 lbs. (501 kg)  |
| 10'         | 3.05       | 59.5" (151 cm) | 139.6" (355 cm) | 39" (99 cm)  | 3.4 yds3 (2.6 m3)  | 1095 lbs. (497 kg)  |
| 10' HC      | 3.05       | 80.0 (230 cm)  | 139.6" (355 cm) | 43" (109 cm) | 4.4 yds3 (3.4 m3)  | 1205 lbs. (547 kg)  |
| 11'         | 3.35       | 59.5" (151 cm) | 151.6" (385 cm) | 39" (99 cm)  | 3.6 yds3 (2.8 m3)  | 1195 lbs. (542 kg)  |
| 11' LP*     | 3.35       | 59.5" (151 cm) | 151.6 (385 cm)  | 32" (81 cm)  | 2.4 yds3 (1.8 m3)  | 1100 lbs. (499 kg)  |
| 12'         | 3.66       | 59.5" (151 cm) | 163.6" (416 cm) | 39" (99 cm)  | 3.9 yds3 (3.0 m3)  | 1295 lbs. (587 kg)  |

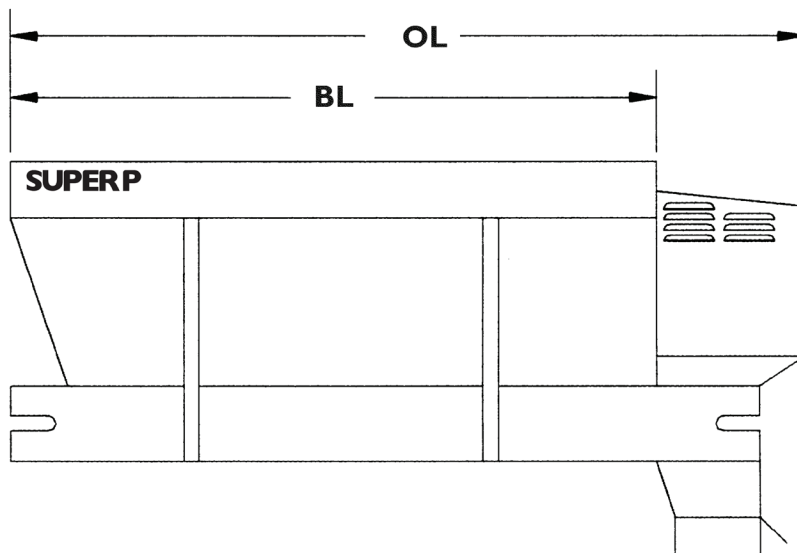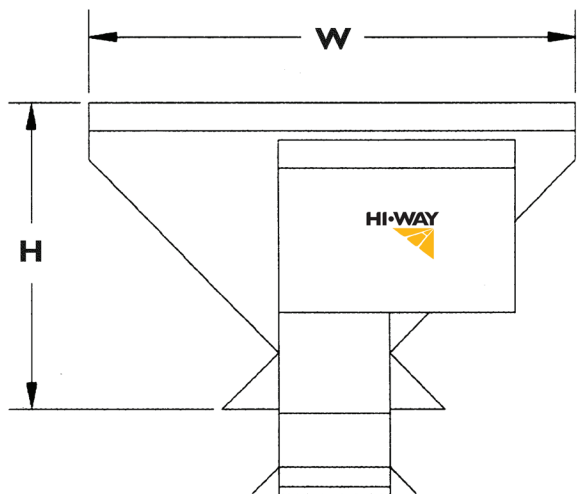

Products and specifications subject to change without notice.  
 Photos and illustrations may or may not include optional equipment.  
 Hi-Way® is a registered trademark of Highway Equipment Company, Inc., d/b/a New Leader Manufacturing.  
 © 2025 Highway Equipment Company, Inc., d/b/a New Leader Manufacturing.  
 HWSP-2020-01