

 1330 76th Ave SW
Cedar Rapids, Iowa

 319.363.8281

 NewLeader.com



WHAT **IT** DOES

Productivity

- 120' spread pattern
- 33% more efficient high output design
- Uniformity of spread pattern
- 16-section swath width
- Boundary and half-width spreading

Ease of Use

- Built-in spread pattern wizard
- Ability to pattern test and set the machine, using only 3 pans
- New NLM control system with intuitive user interface with minimal button presses for field operation
- Conveyor calibration is not required

Versatility

- Dual bins for two product application
- Low sensitivity to driving centers
- Variable rate width spreading from 120', 90', 80' and 70'

Ease of Maintenance

- Zero grease points
- New positive drive belt requiring minimal maintenance
- Tool-free components
- Easy to replace Stainless Steel fin overlays

AGCO

With single or dual bins and stacked conveyors, the NL7 spreader represents a shift in the agriculture industry.



Combining unprecedented design with ease-of-use, the NL7 can help you achieve unrivaled productivity. Crop damage, unnecessary passes, overlap, and soil compaction will become a thing of the past for you and your business.



TECHNICAL DATA SHEET



NL720 Dual Bin

Dual-Bin Capacity	Cu Ft (Cu M)
12' (3.66m) - Bin 1	183 (5.2)
12' (3.66m) - Bin 2	120 (3.4)
12' (3.66m) - Total	303 (8.6)
Est. Weight	Lbs (kg)
12' (3.66m)	6,200 (2,812)

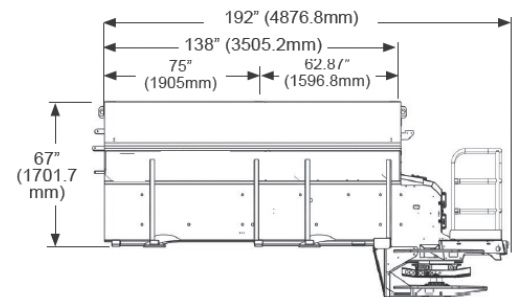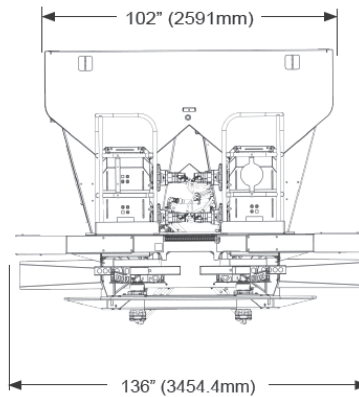

NL710 Single Bin

Single-Bin Capacity	Cu Ft (Cu M)
12' (3.66m) - Bin 1	310 (8.8)
Est. Weight	Lbs (kg)
12' (3.66m)	5,500 (2,495)

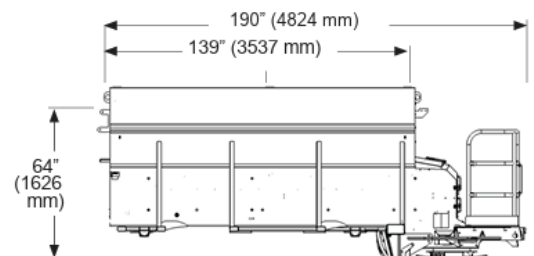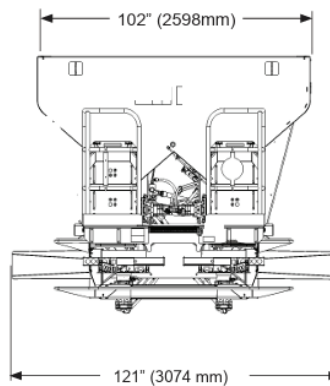

New Leader Manufacturing
 Equipmentsales@newleader.com
 800-363-8281