



NL4500G4 Edge

Variable Dry Rate Nutrient Applicator

PRECISION APPLICATION

- Boundary spreading
- Precise independent spinner control and monitoring

EASE OF MAINTENANCE

- Centralized grease banks
- Automatic hydraulic chain tensioning system
- Automatic chain oiling function and alarms
- 304 stainless steel feedgate, spinner jacks, and handle
- 304 stainless steel cross tubes, mounts, and take-up brackets

EASE OF USE

- Intuitive New Leader user interface
- System sensors to monitor spreader performance
- Feedgate optimizer to calculate height
- Standard High Output Kit for high-rate fertilizer applications (remove for lime)

MULTI-PRODUCT CAPABILITIES

- MultiApplier
 - Two product, variable rate spreading
 - Stainless steel connections for easy removal
 - Enhanced feedgate design for higher outputs
- MultiBin
 - Four product, variable rate spreading
 - Stainless steel connections for easy removal
 - Stainless steel top cover



NL4500 G4 Edge Specifications


SINGLE BIN



The single bin is available in 409 painted stainless steel. A removable end gate, inverted V, and electric oiler are included.

Unit Length	Estimated Weight	Struck Capacity
14 FT (4.27 M)	1,400 LBS (635 KG)	298 CU FT (8.44 CU M)


MULTAPPLIER™

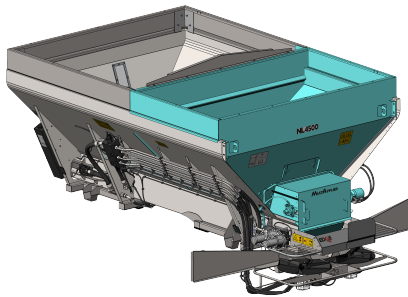

The MultApplier™ allows for two separate materials to be spread simultaneously and features a 24-inch wide #4 belt-over-chain conveyor with 409 stainless steel links. The direct-driven conveyor is also controlled independently enabling the delivery of material at variable rates through the adjustable gate at the rear of the hopper body. The hillside divider improves material placement on the spinner for a more effective spread pattern.

Struck Capacity		
Bin 1	Bin 2	Total
253 CU FT (7.16 CU M)	115 CU FT (3.25 CU M)	368 CU FT (10.41 CU M)

MULTIBIN™

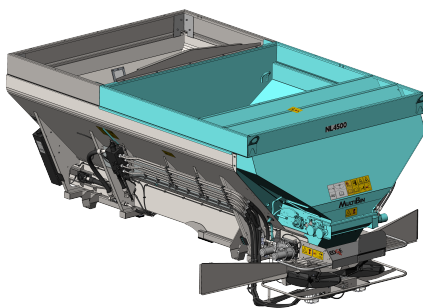

Inserting the MultiBin will convert the spreader to 4 bins, which can be used independently or together for straight and variable rate applications. Sensors are located in all bins to warn when materials are low. The MultiBin also comes equipped with an upper and lower material divider which improves material placement on the spinner for a more effective spread pattern.

Struck Capacity				
Bin 1	Bin 2	Bin 3	Bin 4	Total
137 CU FT (3.8 CU M)	139 CU FT (3.94 CU M)	23 CU FT (0.65 CU M)	21 CU FT (0.59 CU M)	320 CU FT (8.98 CU M)

Products and specifications subject to change without notice. Photos and illustrations may or may not include optional equipment.