



# NL4500G4 Edge

## Variable Dry Rate Nutrient Applicator

### PRECISION APPLICATION

- Boundary spreading
- Precise independent spinner control and monitoring

### EASE OF USE

- Intuitive New Leader user interface
- System sensors to monitor spreader performance
- Feedgate optimizer to calculate height
- Standard High Output Kit for high-rate fertilizer applications (remove for lime)

### EASE OF MAINTENANCE

- Centralized grease banks
- Automatic hydraulic chain tensioning system
- Automatic chain oiling function and alarms
- 304 stainless steel feedgate, spinner jacks, and handles

### MULTI-PRODUCT CAPABILITIES

- MultiApplier
  - Two product, variable rate spreading
  - Stainless steel connections for easy removal
  - Enhanced feedgate design for higher outputs
- MultiBin
  - Three or four product, variable rate spreading
  - Stainless steel connections for easy removal
  - Optional top cover




# NL4500G4 Edge Specifications

The single bin is available in 304 stainless steel or 409 painted stainless steel. A removable end gate, inverted V, and electric oiler are included.



NL4500 Single Bin


Unit Length	Estimated Weight	Struck Capacity
12 FT (3.66 M)	4,400 LBS (1,996 KG)	253 CU FT (7.16 CU M)
13 FT (3.96 M)	4,600 LBS (2,087 KG)	276 CU FT (7.82 CU M)
14 FT (4.27 M)	4,800 LBS (2,177 KG)	298 CU FT (8.44 CU M)
15 FT (4.57 M)	5,000 LBS (2,268 KG)	321 CU FT (9.09 CU M)
16 FT (4.88 M)	5,300 LBS (2,404 KG)	343 CU FT (9.71 CU M)

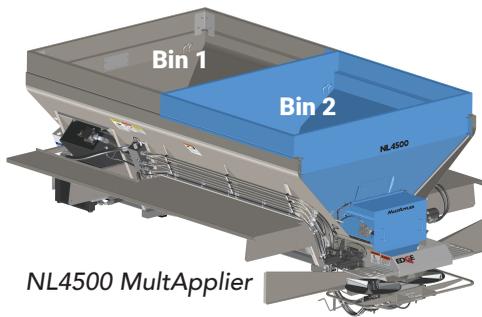

NL4500 MultiApplier

The MultiApplier™ allows for two separate materials to be spread simultaneously and features a 24-inch wide #4 belt-over-chain conveyor with 409 stainless steel links. The direct-driven conveyor is also controlled independently enabling the delivery of material at variable rates through the adjustable gate at the rear of the hopper body. The hillside divider improves material placement on the spinner for a more effective spread pattern.

	Struck Capacity *14' Length		
	Bin 1	Bin 2	Total
5 FT	253 CU FT (7.16 CU M)	115 CU FT (3.25 CU M)	368 CU FT (10.41 CU M)
7 FT	195 CU FT (5.52 CU M)	161 CU FT (4.60 CU M)	356 CU FT (10.12 CU M)

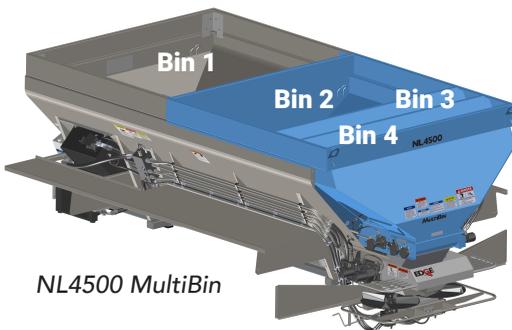

NL4500 MultiBin

Inserting the MultiBin will convert the spreader to 3 or 4 bins, which can be used independently or together for straight and variable rate applications. Sensors are located in all bins to warn when materials are low. The MultiBin also comes equipped with an upper and lower material divider which improves material placement on the spinner for a more effective spread pattern.

Struck Capacity				
Bin 1	Bin 2	Bin 3	Bin 4	Total
195 CU FT (5.52 CU M)	139 CU FT (3.94 CU M)	23 CU FT (0.65 CU M)	21 CU FT (0.59 CU M)	378 CU FT (10.70 CU M)

Products and specifications subject to change without notice. Photos and illustrations may or may not include optional equipment.