

 1330 76th Ave SW
Cedar Rapids, Iowa

 319.363.8281

 NewLeader.com

NL7

WHAT **IT** DOES

Productivity

- 120' spread pattern
- 33% more efficient high output design
- Uniformity of spread pattern
- 16-section swath width
- Boundary and half-width spreading

Ease of Use

- Built-in spread pattern wizard
- Ability to pattern test and set the machine, using only 3 pans
- New NLM control system with intuitive user interface with minimal button presses for field operation
- Conveyor calibration is not required

Versatility

- Low sensitivity to driving centers
- Variable rate width spreading from 120', 90', 80' and 70'
- Automated in field pattern control as width or product volume change

Ease of Maintenance

- Zero grease points
- New positive drive straight belt requiring minimal maintenance
- Tool-free components
- Easy to replace fin overlays

RBR

With single or dual bins and stacked conveyors, the NL7 spreader represents a shift in the agriculture industry.



Combining unprecedented design with ease-of-use, the NL7 can help you achieve unrivaled productivity. Crop damage, unnecessary passes, overlap, and soil compaction will become a thing of the past for you and your business.



TECHNICAL DATA SHEET

NL720 Dual Bin

Dual-Bin Capacity	Cu Ft (Cu M)
14' (4.26m) - Bin 1	218 (6.2)
14' (4.26m) - Bin 2	145 (4.1)
14' (4.26m) - Total	363 (10.3)
Est. Weight	Lbs (kg)
14' (3.66m)	6,800 (3,084)

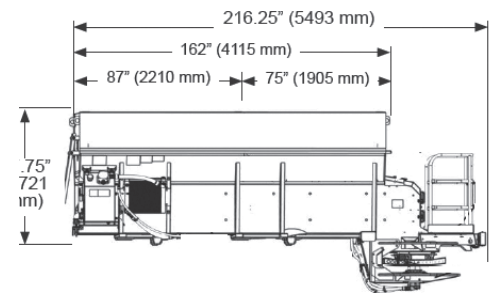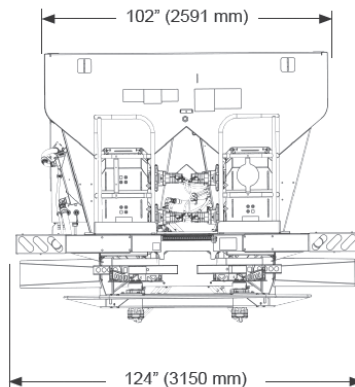

NL710 Single Bin

Dual-Bin Capacity	Cu Ft (Cu M)
14' (4.26 m) - Bin 1	395 (11.2)
Est. Weight	Lbs (kg)
14' (4.26 m)	6,100 (2767)

